



CN20

Moderate Frequency Ni-Zn Ferrite

*CN20 was designed to meet the frequency requirements of 0.5 to 30 MHz.
This material is suitable for applications in broad band linear transformers for RF amplifiers,
hybrid transformers and EMP suppression.*


Typical Properties

Initial Permeability	925
Maximum Permeability	5000
Saturation Flux Density	4000 Gauss
Remanent Flux Density	2600 Gauss
Coercive Force	0.20 Oersted
Curie Temperature	185°C
dc Volume Resistivity	10^{10} ohm-cm
Bulk Density	5.24 g/cc


Unless otherwise specified, all tests were performed at 10 KHz, 22°C

Bs tested at 1 KHz, 20 Oersted • Br, Hc at 1 KHz, 5 Oersted


Initial Permeability vs. Temperature
at 500 KHz

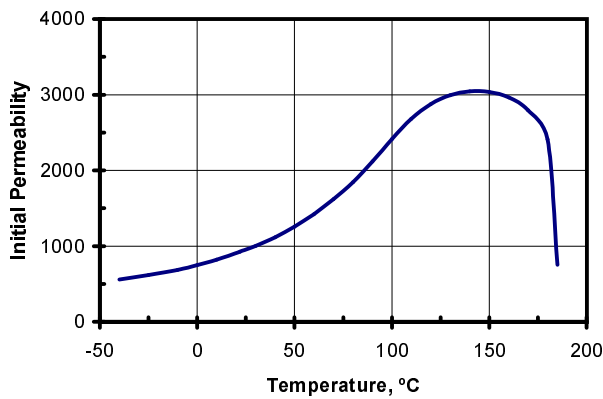

Permeability vs. Flux Density

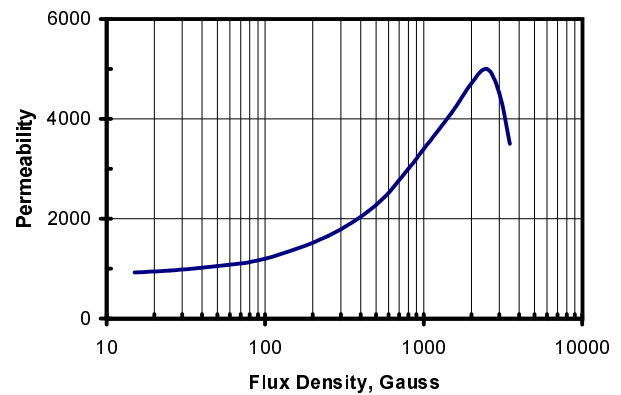

Initial Permeability vs. Frequency

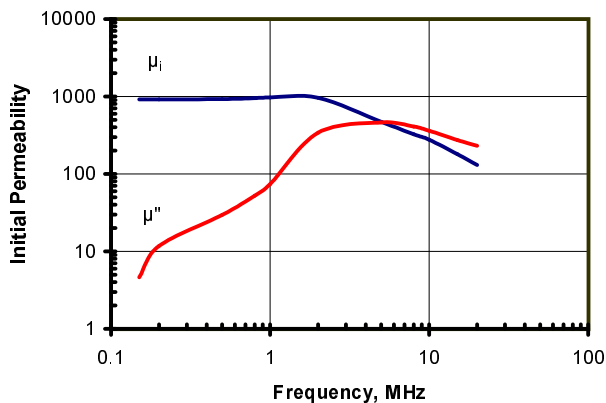

BH Loop Parameters vs. Temperature

